


Project : MT6765 LPDDR3
REF_SCH TOP LEVEL

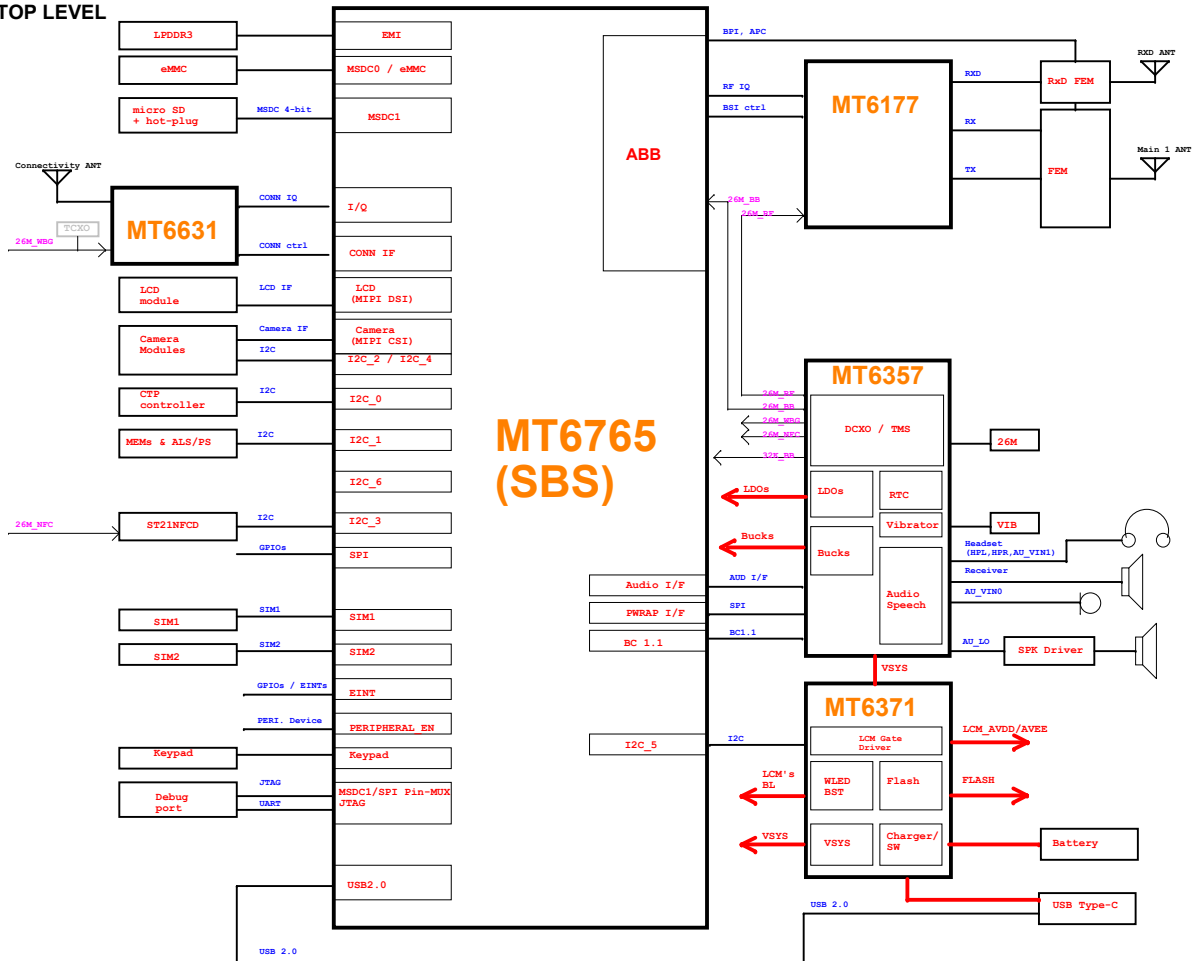

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 01_Block_Diagram		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 1 of 99	

I2C	Sub SYS	Function	Part Number	I2C Spec.	I2C Slave Address / Write / Read (7-bit mode)	
I2C-0	AP	Cap Touch controller	GT1151	400 Kbps	0x5D	Write:0xBA / Read:0xBB
I2C-1 (I3C)	AP Sensor Hub	Magnetic Sensor	AK09918C	400 Kbps	0x0C	Write:0x18 / Read:0x19
		Ambient Light Sensor Proximity Sensor	CM36558	400 Kbps	0x51	Write:0xA2 / Read:0xA3
		Pressure Sensor	BMP280	400 Kbps	0x77	Write:0xEE / Read:0xEF
I2C-2 (I3C)	AP	Rear Camera	IMX230	400 Kbps	0x1A	Write:0x34 / Read:0x35
			EEPROM	400 Kbps	0x50	Write:0xA0 / Read:0xA1
			AF driver	400 Kbps	0x0C	Write:0x18 / Read:0x19
I2C-3	AP	Audio Smart PA	RT5510	400 Kbps	0x34	Write:0x68 / Read:0x69
		NFC	ST21NFCD	400 Kbps	0x08	Write:0x10 / Read:0x11
I2C-4 (I3C)	AP	Front Camera	S5K2T7	400 Kbps	0x2D	Write:0x5A / Read:0x5B
			EEPROM	400 Kbps	0x52	Write:0xA4 / Read:0xA5
I2C-5	AP	Sub-PMIC	MT6371 PMU	3.4 Mbps	0x34	Write:0x68 / Read:0x69
			MT6371 PD	3.4 Mbps	0x4E	Write:0x9C / Read:0x9D
I2C-6	AP					

Note : I2C Spec. : Standard mode (100 kbps) and Fast mode (400 kbps), Fast mode Plus (1 Mbps) and High-speed mode (3.4 Mbps)

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 02_I2C_ID_Overview

Size C Project F9_MB_V1


Rev V1


Date: Friday, October 19, 2018

Sheet 2 of 99

Date	Category	Item
2017.11.24 (V0.1)	Page 05	V0.1 Release
2017.12.7 (V0.2)	Page 11	Change power of AVDD18_DDR(H21) from VIO18_PMU to EMI_VDD1, connecting EMI_VDD1 to SH2102 in star connection
	Page 12	Add Note 12-5
	Page 21	Add SH2102 for star connection among EMI_VDD1, AVDD18_SOC, and VIO18_PMU
	Page 22	1. Change C2304 from C / 1 / uF / 10V to C / 1 / uF / 6.3V 2. Change R2301 from R / 1.5 / K to R / 7.5 / K 3. Update Note 22-5
	Page 44	1. To enhance LPDDR3 power off sequence, change C4422 from 0.1uF to 2.2uF, and change C4423 from 0.1uF to 1uF 2. Change VDD1 power of eMCP from VIO18_PMU to EMI_VDD1, fulfilling power rail in star connection
Page 51	1. Add 2nd source plan for U5004 2. Add Note 51-3 and Note 51-4	

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 05_Change_Notice		
Size C	Project F9_MB_V1	Rev v1
Date: Friday, October 19, 2018	Sheet 5 of 99	

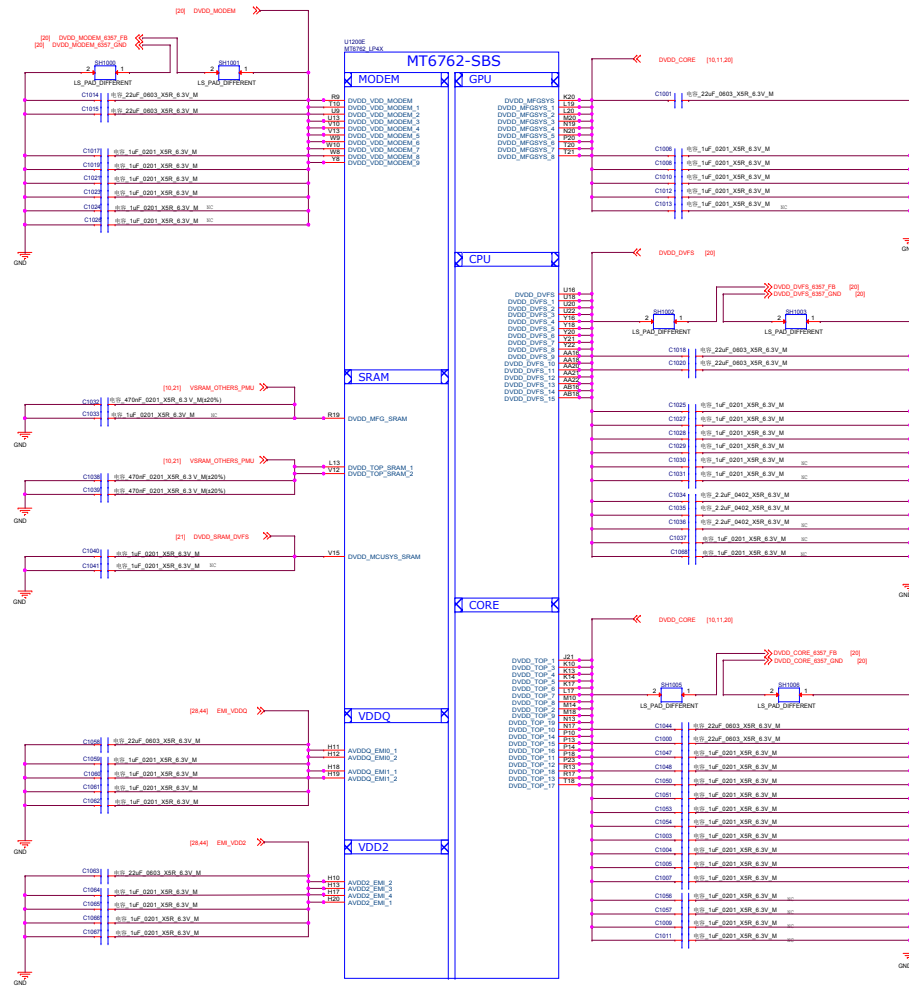

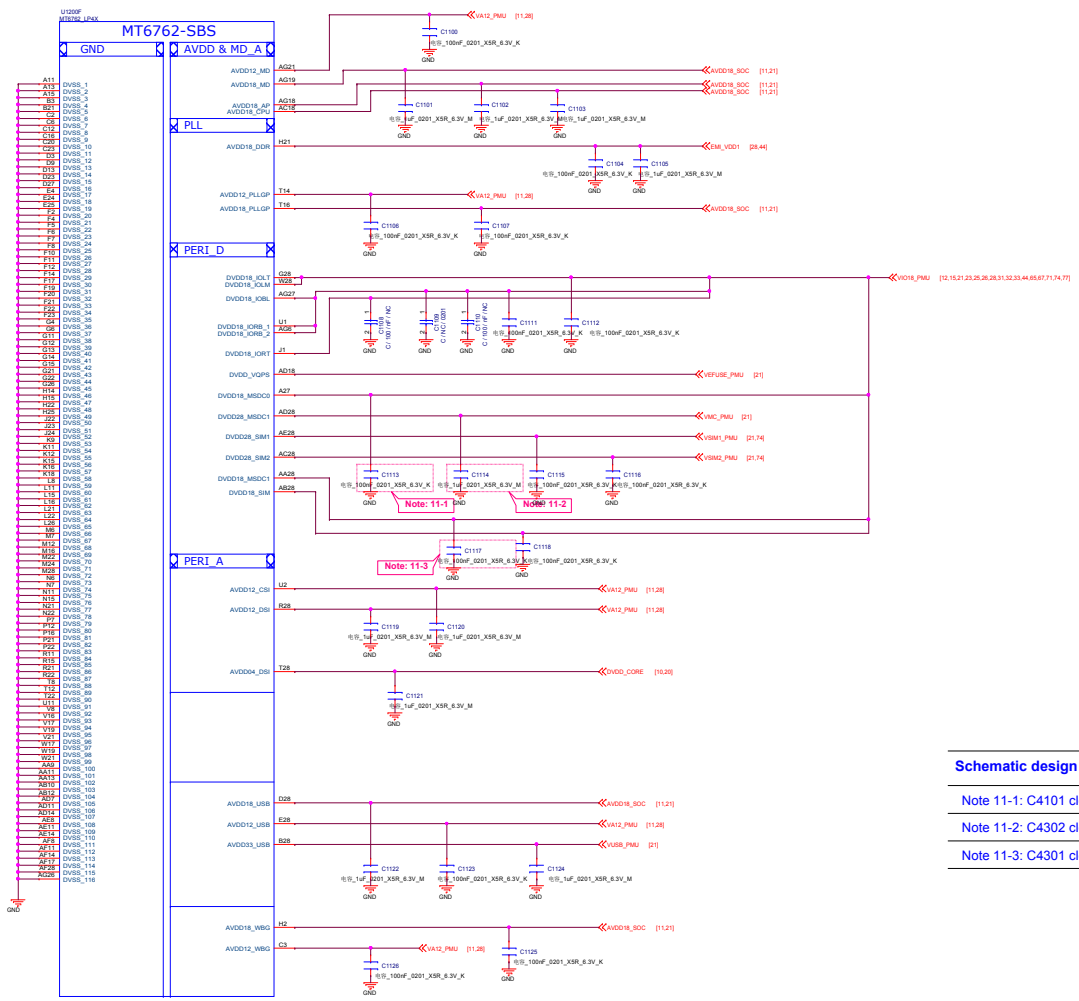



Schematic design notice of "11_BB_POWER_IO" page.

Note 11-1: C4101 closed DVDD18_MSDC0 150mil

Note 11-2: C4302 closed DVDD28_MSDC1 150mil

Note 11-3: C4301 closed DVDD18_MSDC1 150mil


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 11_BB_POWER_IO			
Size D	Project F9_MB_V1	Rev v1	
Date: Friday, October 19, 2018	Sheet 11 of 99		

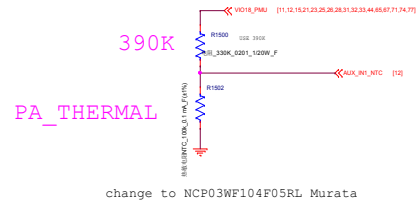

Thermistor to sense RF PA temperature


1. NTC1501 must close to LTE Band 7 PA or the hottest PA $2mm$.
2. The distance is the shortest distance from package edge to edge.

Thermistor / To sense board level temperature

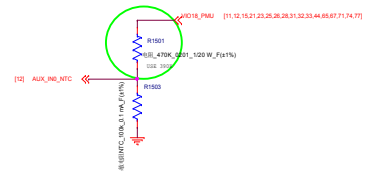

1. NTC1501 must keep a distance about 6-8 mm away from AP and far from other heat sources 10 mm at least.
2. The distance is the shortest distance from package edge to edge.

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 15_BB_AUXADC_Thermal		
Size D	Project F9_MB_V1	Rev v1
Date: Friday, October 19, 2018	Sheet 15 of 99	

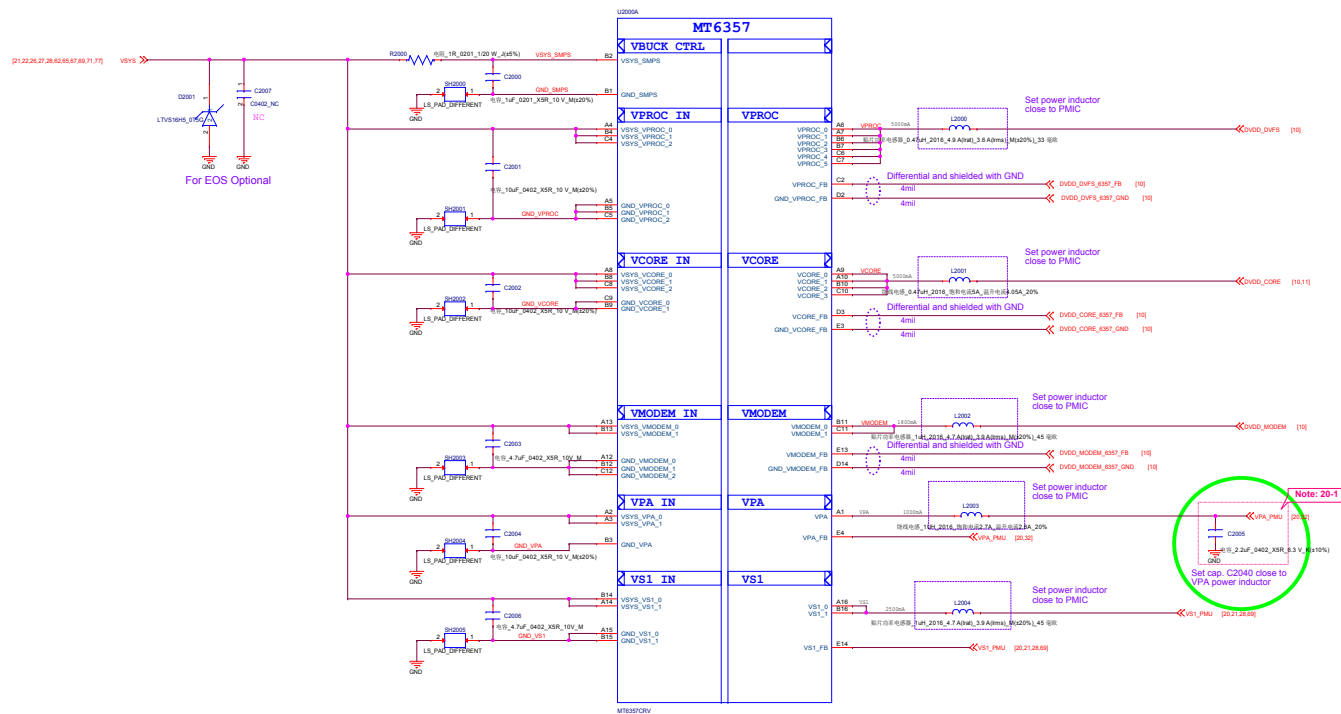

Schematic design notice of "20_POWER_MT6357_Buck"

Note 20-1: C2040, please choose 0402 size


Note 20-2: PMIC Part number notice for MT6765/62/61 platform

MTK Platform	PMIC
MT6765 / 62	MT6357 CRV
MT6761	MT6357 MRV

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 20_POWER_MT6357_Buck		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 20 of 99	

MT6356 LDO output

Input Power	Power Name	Output Voltage (V)	Output Current	Default Voltage
LDO from VBAT	VFE28	2.8	40mA	2.8V
	VX028	2.24	25mA	2.24V
	VCN28	2.8	40mA	2.8V
	VCAMA	1.8/2.5/2.8	200mA	2.8V
	VAUX18	1.8	20mA	1.8V
	VAUD28	2.8	50mA	2.8V
	VB1F28	2.8	1mA	2.8V
	VCN33	3.3/3.4/3.5/3.6	800mA	3.3V
	VLD028	2.8/3.0	360mA	2.8V
	VIO28	2.8	200mA	2.8V
	VNC	1.86/2.9/3.0/3.3	200mA	3.0V
	VNCH	2.9/3.0/3.3	800mA	3.0V
VEMC	2.9/3.0/3.3	800mA	3.3V	
VSIM1	1.7/1.8/1.86/2.76/3.0/3.1	200mA	1.86V	
VSIM2	1.7/1.8/1.86/2.76/3.0/3.1	200mA	1.86V	
VEBR	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	200mA	2.8V	
VUSB	3.07	50mA	3.07V	
LDO from VS1	VRF18	1.81	450mA	1.81V
	VMIPI	1.71/1.8/1.84	300mA	3.0V
	VCN18	1.8	200mA	1.8V
	VCAMD	1/1.05/1.1/1.2/1.3/1.5/1.8	600mA	1.2V
	VCMIO	1.8	300mA	1.8V
LDO from VS2	VIO18	1.8	1200mA	1.8V
	VRF12	1.2	200mA	1.2V
	VAL12	1.2	300mA	1.2V
	VSRAM_PROC	0.6-1.31	400mA	1.1V
	VSRAM_OTHERS	0.6-1.31	200mA	0.9V
VSRAM_GPU	0.6-1.31	100mA	1.0V	
VDRAM	1.12/1.24	4000mA	1.24V	

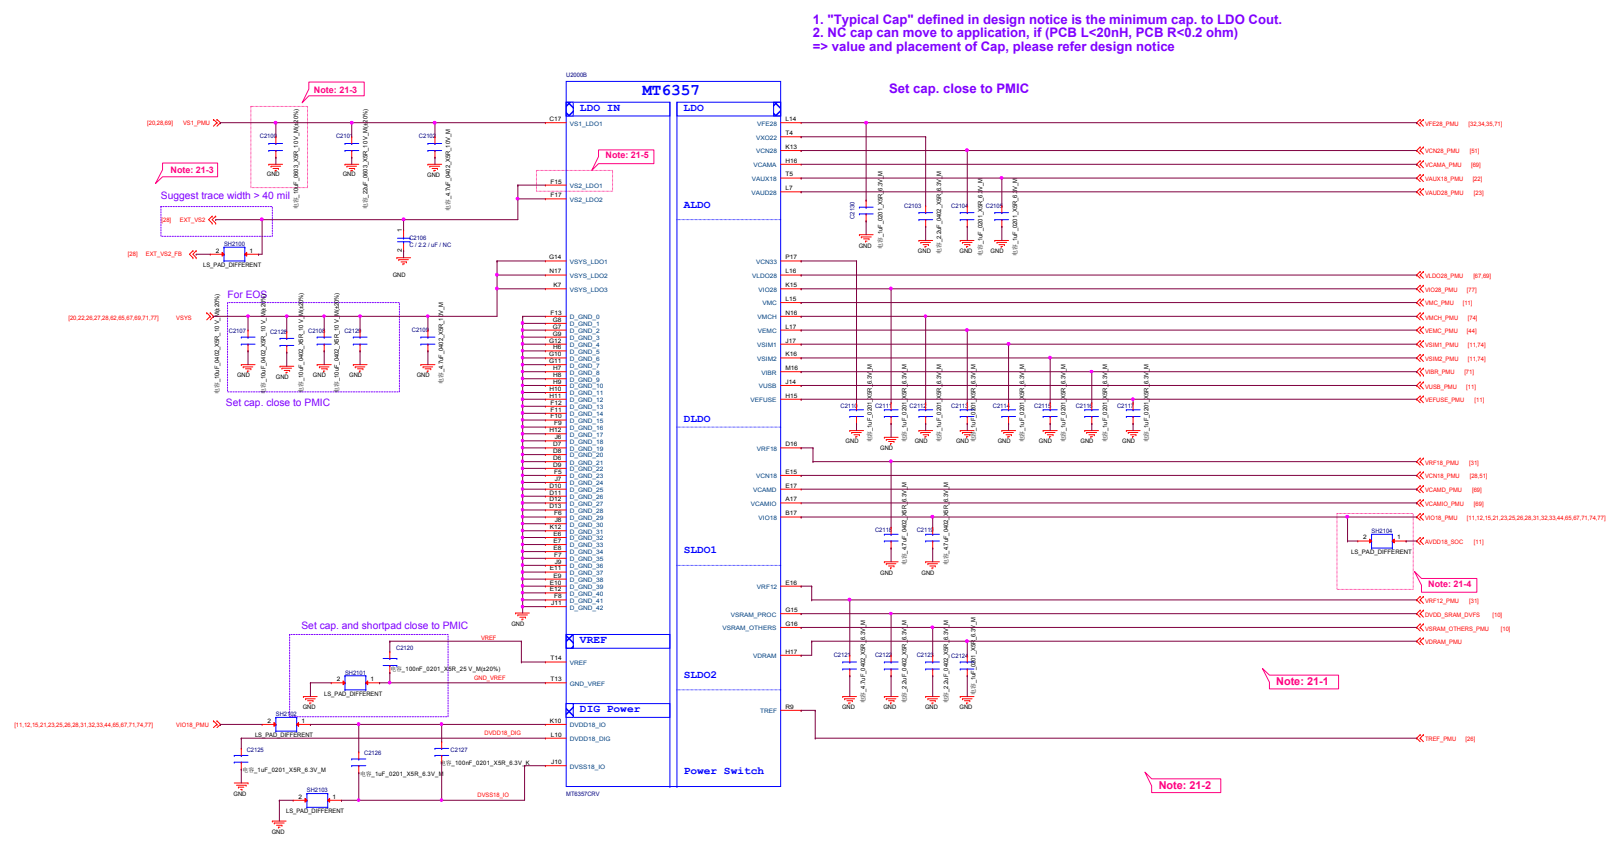

1. "Typical Cap" defined in design notice is the minimum cap. to LDO Out.
 2. NC cap can move to application, if (PCB L<20mH, PCB R<0.2 ohm)
 => value and placement of Cap, please refer design notice

Schematic design notice of "21_POWER_MT6357_LDO"

Note 21-1: If these power trace can meet LDO layout constraint, these CAP can be NC or removed. Please refer to MT6357 design notice.

Note 21-2: Output cap range please follow MT6357CRV LDO design notice

Note 21-3: Ext Buck BOM option

	Ext. buck option	
	w/ EXT VS2 Buck	w/o EXT VS2 Buck
C2104	10uF	22uF
R2851	0-ohm , 0603	NC
R2852	NC	0-ohm , 0603

Note 21-4: Please set SH2101 and SH2102 close to C2141, making star connection among VIO18_PMU, AVDD18_SOC, and EM1_VDD1 near to LDO cap. C2141
 Please also refer to MT6357 design notice for further detail design information


Note 21-5: Please connect VS2_LDO1(F15) to VS1_PMU if voltage applied to VCAMD(E17) >= 1.3 V

华勤通讯 Huaqin Telecom Technology Com., Ltd


Title 21_POWER_MT6357_LDO

Size D	Project F9_MB_V1	Rev V1
--------	------------------	--------







Date: Friday, October 19, 2018 Sheet 21 of 99

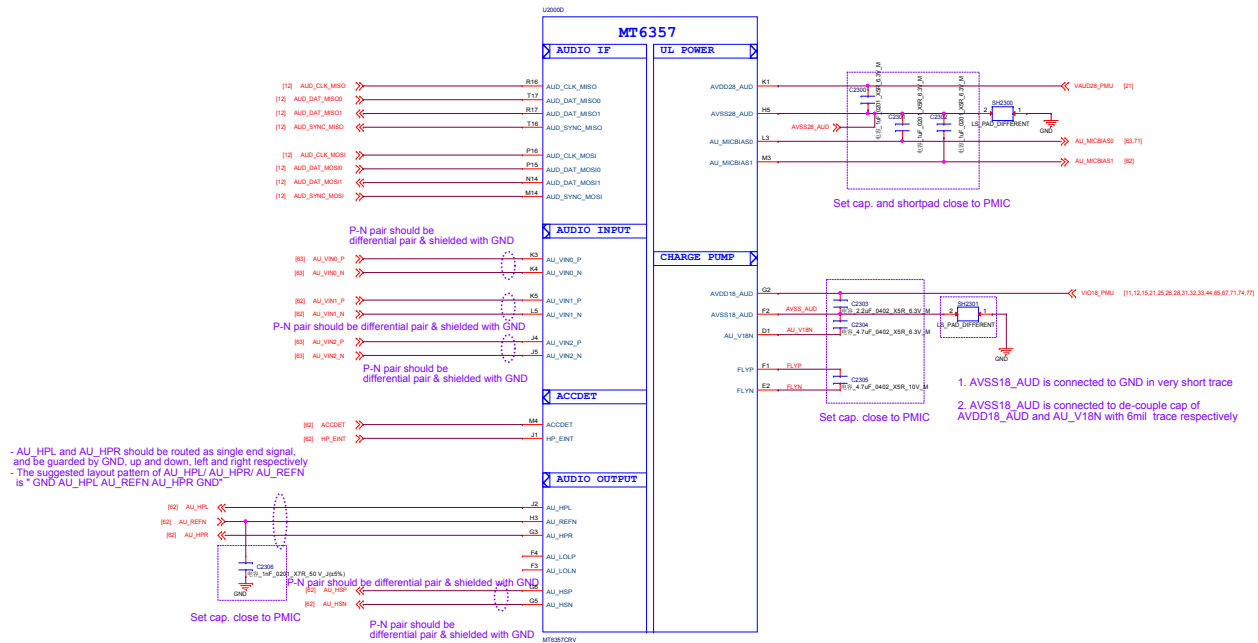

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 23_POWER_MT6357_Audio		
Size D	Project F9_MB_V1	Rev v1
Date: Friday, October 19, 2018	Sheet 23 of 99	

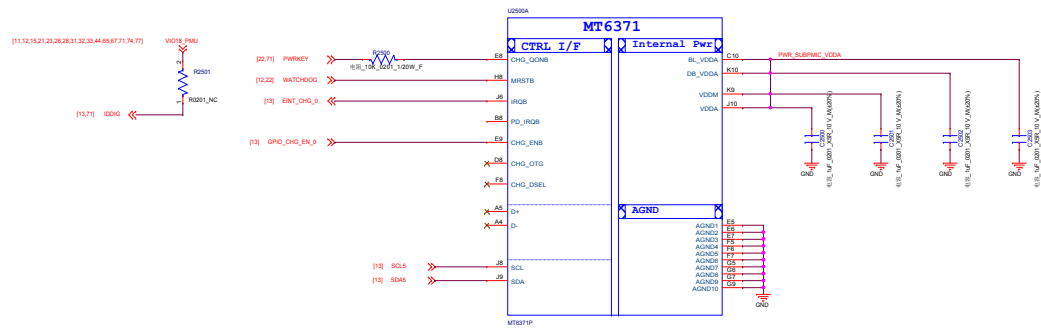


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 25_POWER_SubPMIC-General		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 25 of 99	

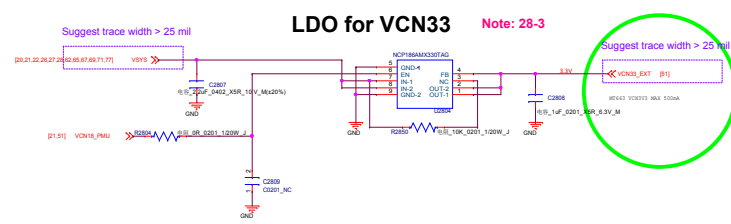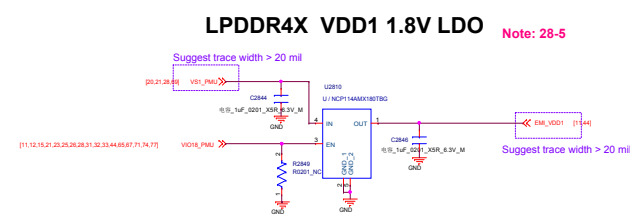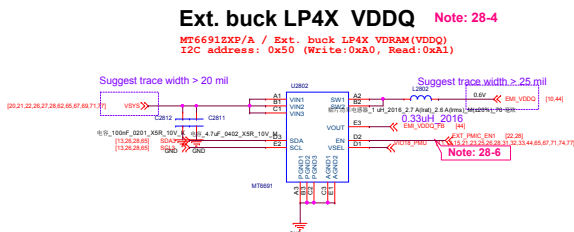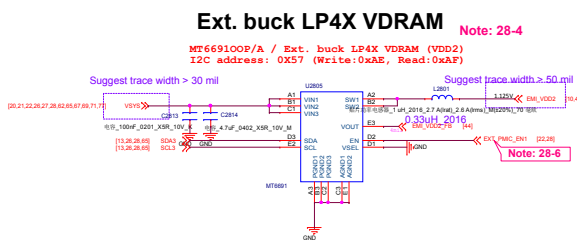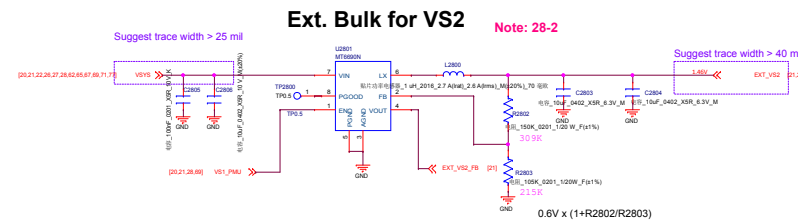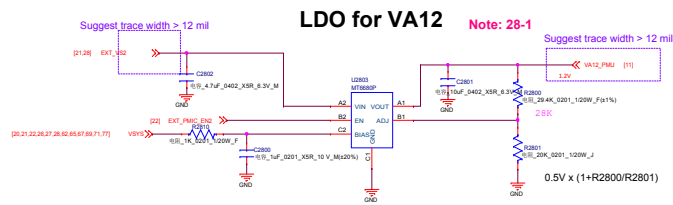

- Schematic design notice of "28_POWER_ThirdParty-Power"**
- Note 28-1: VA12 Layout placement please close to AP
 - Note 28-2: VS2 Buck Layout placement please close to PMIC MT6357
 - Note 28-3: VCN33 LDO Layout placement please close to MT6631
 - Note 28-4: MT6691ZXP/A and MT6691OOP/A Buck Layout Placement please close to LPDDR4X
 - Note 28-5: U2810 LDO Layout Placement Please close to LPDDR4X VDD1 power ball
 - Note 28-6: For EML_VDD2_FB and EML_VDDQ_FB, please follow MMD rule

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 28_POWER_ThirdParty_Powers		
Size D	Project F9_MB_V1	Rev v1
Date: Friday, October 19, 2018	Sheet 28 of 99	

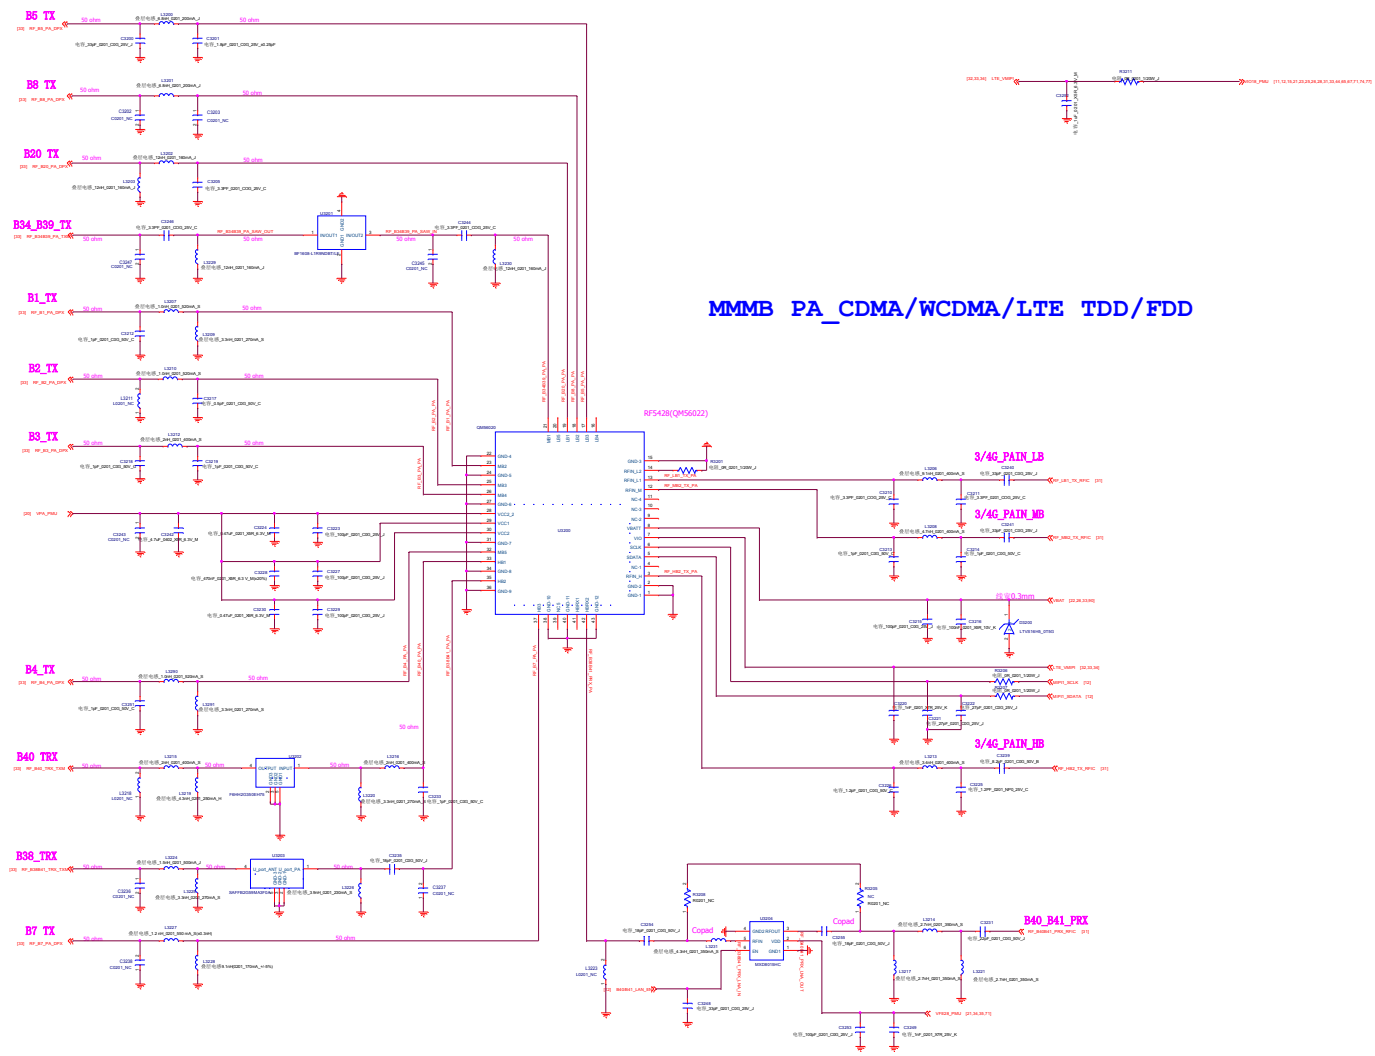

MMB PA_CDMA/WCDMA/LTE TDD/FDD

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 32_RF_MT6177_RF_TX


Size Project F9_MB_V1

Rev v1


Date: Friday, October 19, 2018

Sheet 32 of 99


DIV_ANT

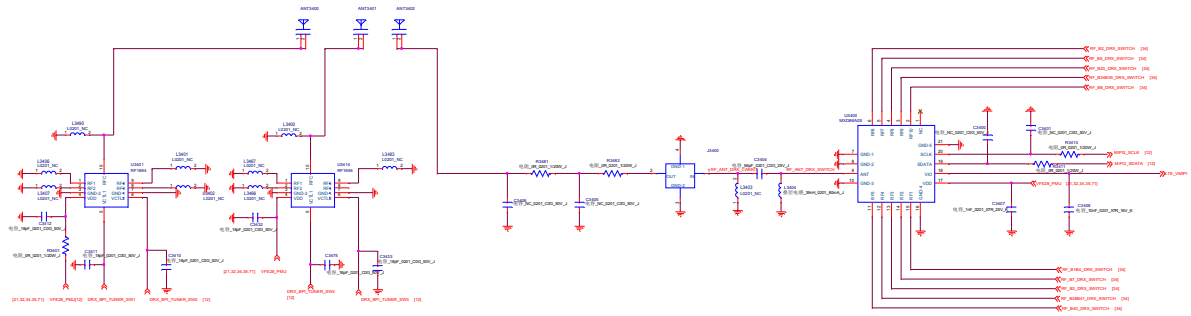


DIV_LB

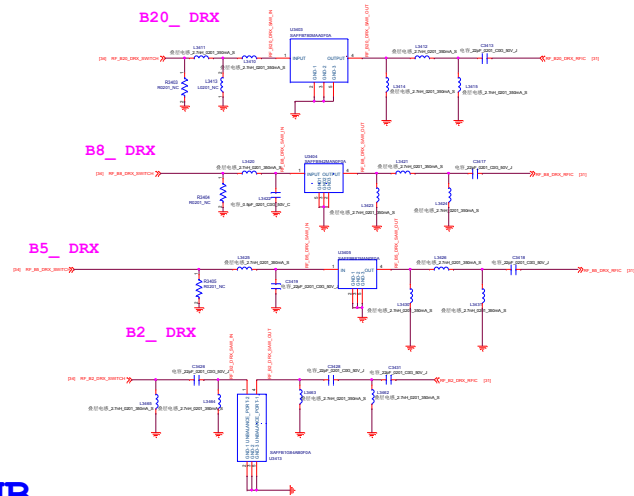

DIV_HB

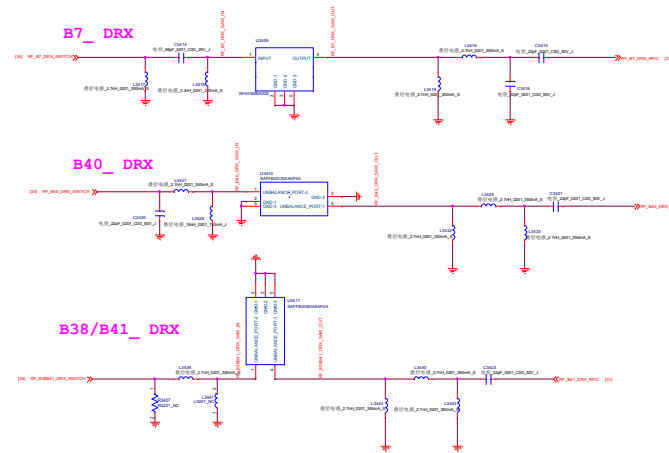

DIV_MB

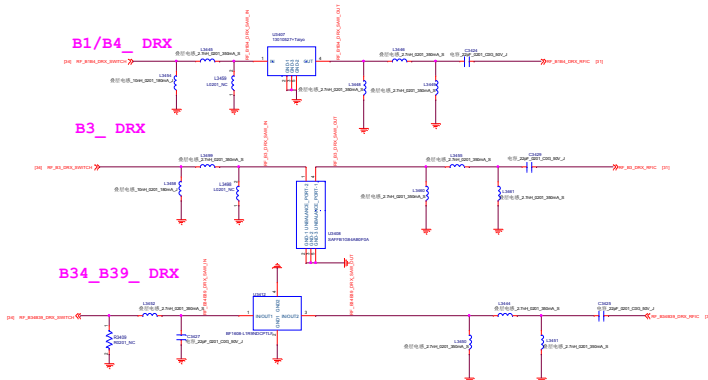

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title 34_RF_MT6177_RF_DRX

Size Project F9_MB_V1

Rev v1

Date: Friday, October 19, 2018


Sheet 34 of 99

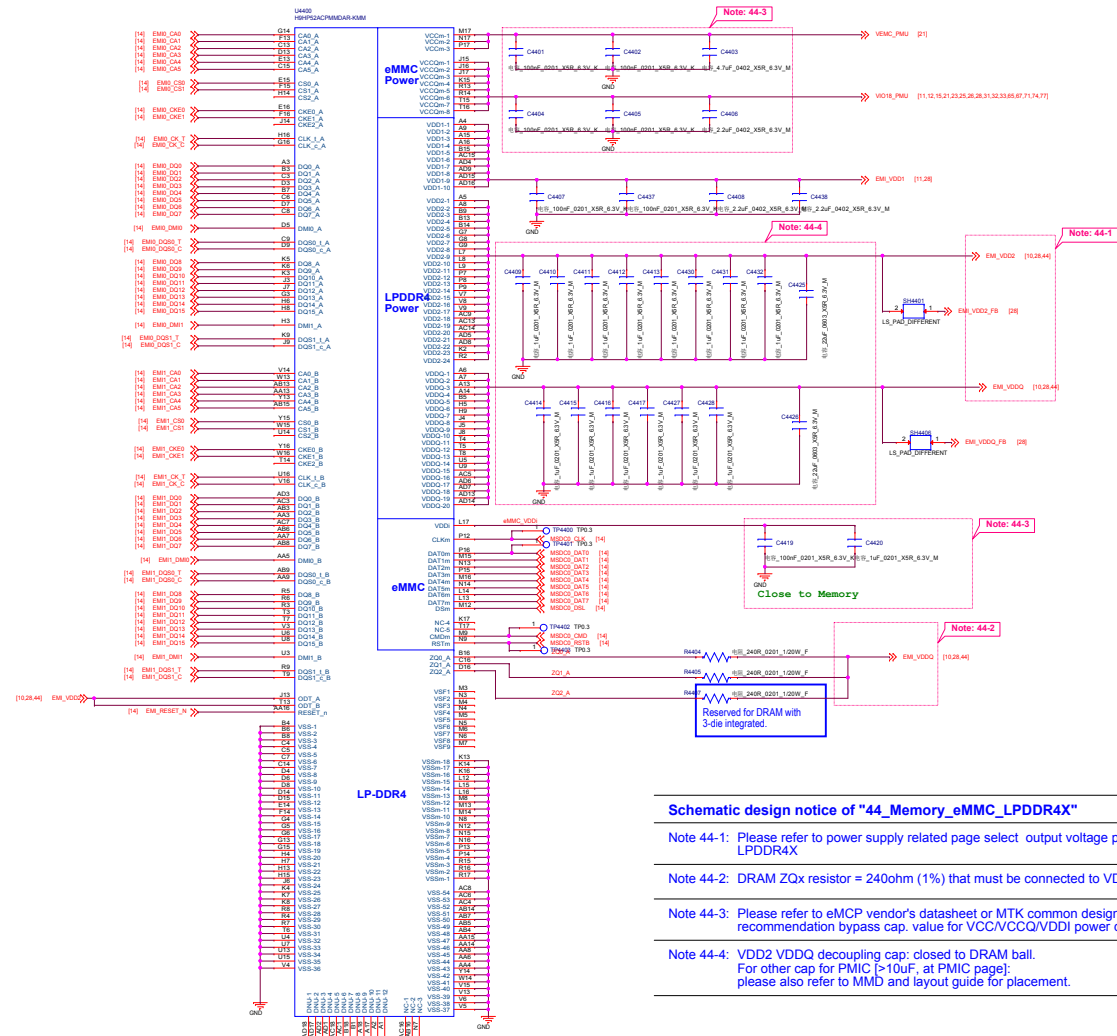

Schematic design notice of "44_Memory_eMMC_LPDDR4X"

- Note 44-1: Please refer to power supply related page select output voltage properly for LPDDR4X
- Note 44-2: DRAM ZQx resistor = 240ohm (1%) that must be connected to VDDQ.
- Note 44-3: Please refer to eMMC vendor's datasheet or MTK common design notice to get the recommendation bypass cap. value for VCC/VCCQ/VDD1 power domains of eMMC.
- Note 44-4: VDD2 VDDQ decoupling cap: closed to DRAM ball.
For other cap for PMIC (>10uF, at PMIC page):
please also refer to MMD and layout guide for placement.

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 44_Memory_eMMC_LPDDR4		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 44 of 99	

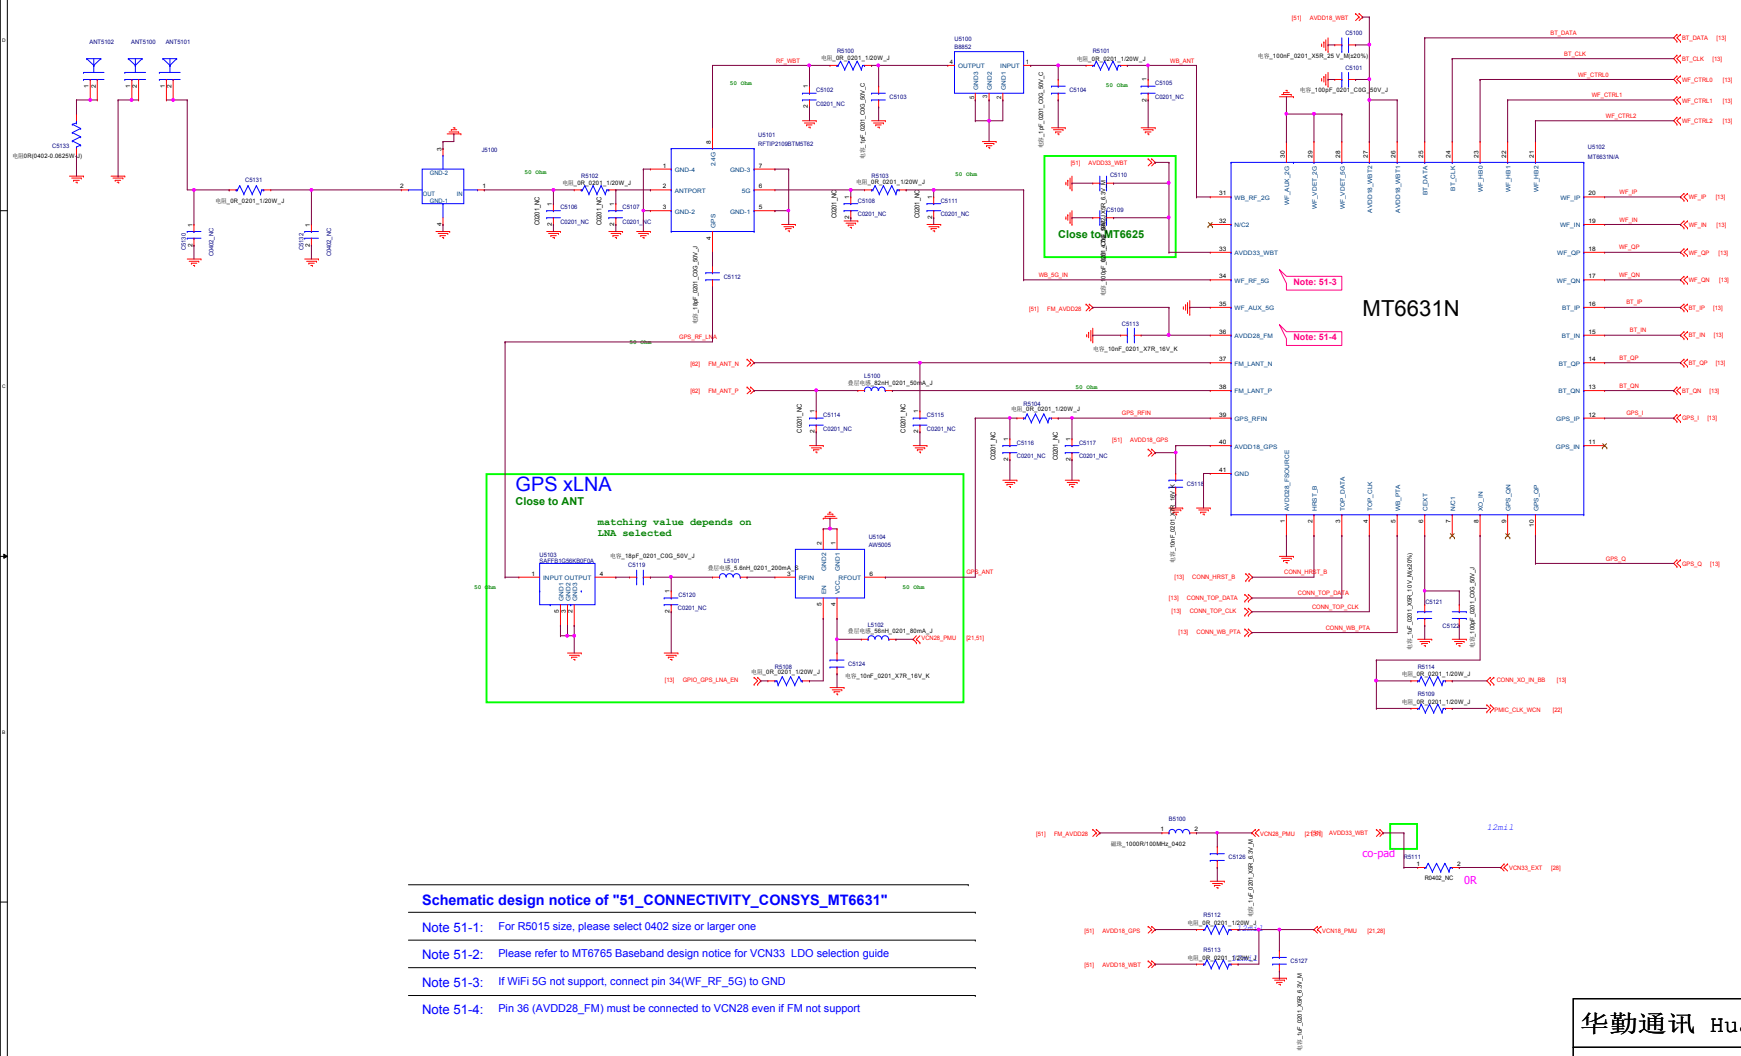


Schematic design notice of "51_CONNECTIVITY_CONSYS_MT6631"

Note 51-1: For R5015 size, please select 0402 size or larger one

Note 51-2: Please refer to MT6765 Baseband design notice for VCN33_LDO selection guide


Note 51-3: If WiFi 5G not support, connect pin 34(WF_RF_5G) to GND

Note 51-4: Pin 36 (AVDD28_FM) must be connected to VCN28 even if FM not support

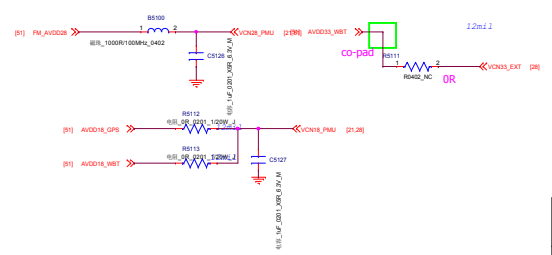


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 51_CONNECTIVITY_CONSYS_MT6631		
Size D	Project F9_MB_V1	Rev v1
Date: Friday, October 19, 2018	Sheet 51 of 99	


AUDIO JACK

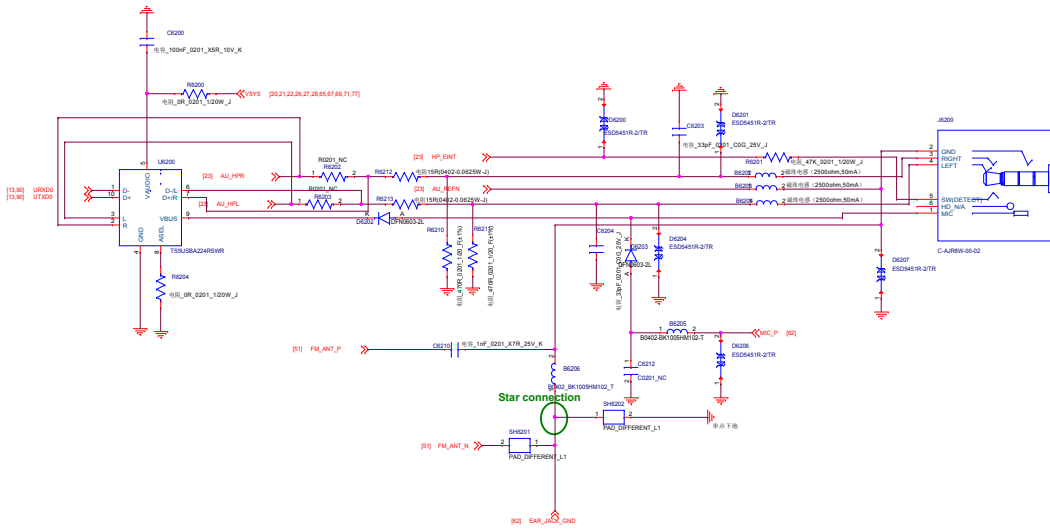

EAR

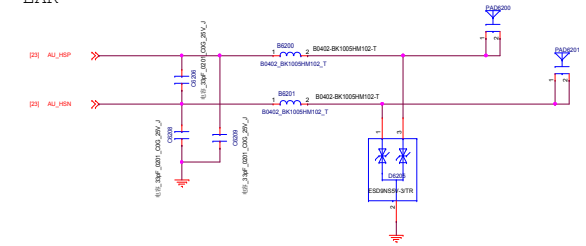


Earphone Microphone

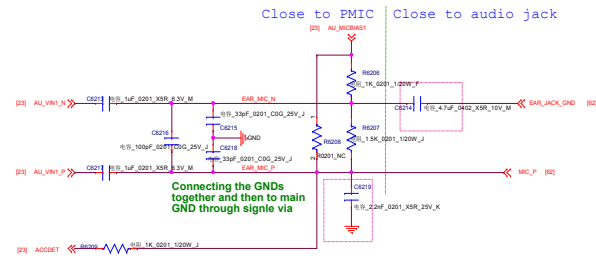


华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 62_PERI_AUDIO_IO		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 62 of 99	


OVP 10.5V

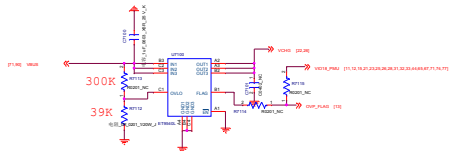


Finger Print

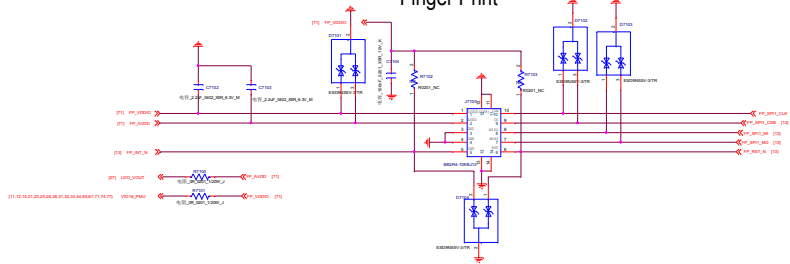

BTB Connector

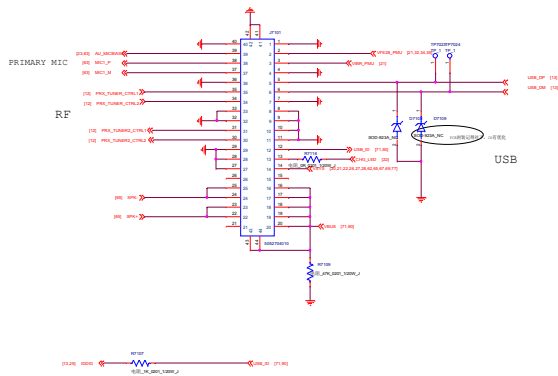

KEY BTB



Signal	Description
KPCOLO	Volume Down
HOMEKEY	Volume Up
POWERKEY	POWER_ON


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 71_PERI_KEY_BTb_OVP_FP


Size E Project F9_MB_V1 Rev v1

Date: Friday, October 19, 2018 Sheet 71 of 99


SDC2

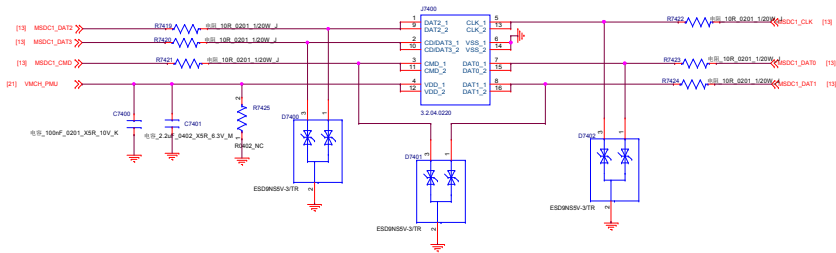

SIM1

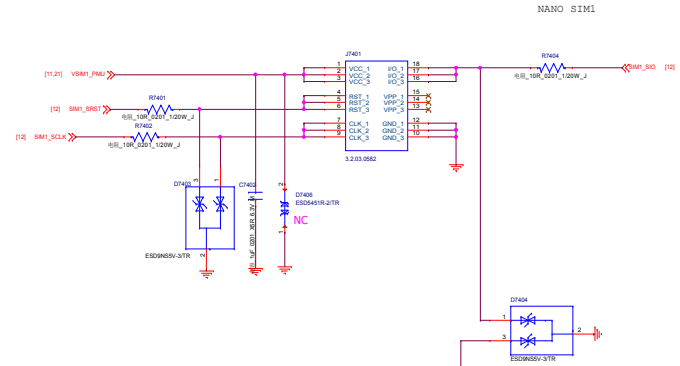


SD_SIM_DET

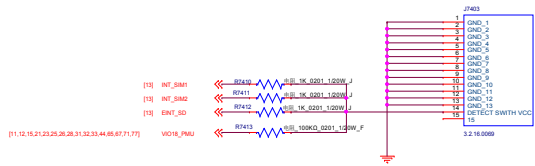

EINT DEAFULT LOW
 plug in int H
 plug OUT int L

SIM2

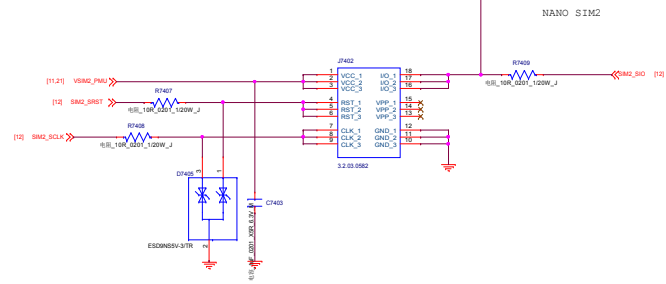

Schematic design notice of "46_MEMORY_SD Card" page.

Note 46-1: For better ESD performance, please select suitable components for system protection.


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 74_PERI_SIM&SD Card

Size D	Project F9_MB_V1	Rev v1
--------	------------------	--------


Date: Friday, October 19, 2018	Sheet 74 of 99
--------------------------------	----------------

Gyro+A sensor

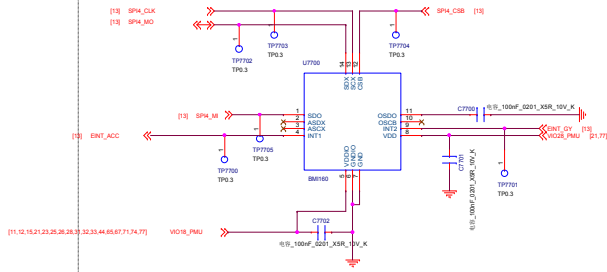

厂家	IOE ADDRESS
BM150	0x68


E-compass

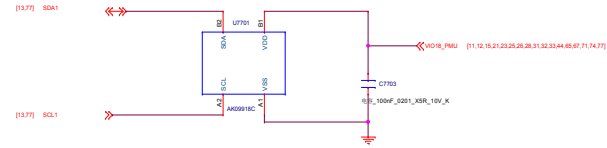

厂家	IOE ADDRESS
HMC5883L	0ch

ALS PS

厂家	IOE ADDRESS


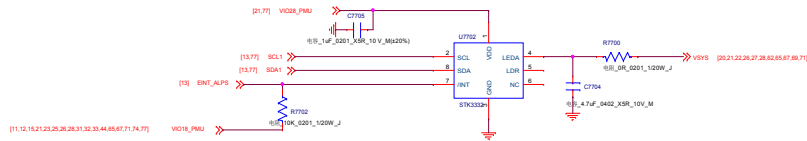


华勤通讯 Huaqin Telecom Technology Com., Ltd


Title 77_PERI_SENSORS_MEMs_ALS/PS

Size	Project	Rev
D	F9_MB_V1	V1

Date: Friday, October 19, 2018	Sheet 77 of 99
--------------------------------	----------------

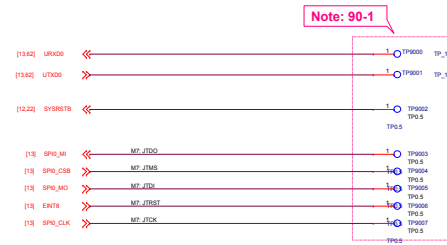

屏蔽罩



华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 90_DEBUG_IO		
Size D	Project F9_MB_V1	Rev V1
Date: Friday, October 19, 2018	Sheet 90 of 99	